



## SN8 INDEX



---

Bends – Plain – RRJ	4.1
Junctions – Wye – RRJ	4.2
Junctions – Wye – Double RRJ	4.3
Junctions – Lunden – RRJ	4.4
Junctions – Lunden – Double RRJ	4.5
Manhole – Short – Plain – RRJ	4.6
Manhole – Short – Gritted – RRJ	4.6
Coupling – Plain – RRJ	4.7
Coupling – Slip – RRJ	4.7

All rubber ring joint socket profiles are suitable only for use with fixed ring type “Anger Lock” rings.

## BENDS – PLAIN – RRJ

Code	Description	A	B	C	D
1571.150.11° (SN8)	Plain Bend RRJ				
1571.150.22° (SN8)	Plain Bend RRJ				
1571.150.45° (SN8)	Plain Bend RRJ				
1571.150.88° (SN8)	Plain Bend RRJ				
1571.175.11° (SN8)	Plain Bend RRJ	500		200	
1571.175.22° (SN8)	Plain Bend RRJ	500		200	
1571.175.45° (SN8)	Plain Bend RRJ	500		200	
1571.175.88° (SN8)	Plain Bend RRJ	500		200	
1571.225.11° (SN8)	Plain Bend RRJ	650		250	
1571.225.22° (SN8)	Plain Bend RRJ	650		250	
1571.225.45° (SN8)	Plain Bend RRJ	650		250	
1571.225.88° (SN8)	Plain Bend RRJ	650		250	
1571.300.11° (SN8)	Plain Bend RRJ	700		315	
1571.300.22° (SN8)	Plain Bend RRJ	700		315	
1571.300.45° (SN8)	Plain Bend RRJ	700		315	
1571.300.88° (SN8)	Plain Bend RRJ	700		315	
1571.375.11° (SN8)	Plain Bend RRJ	800		400	
1571.375.22° (SN8)	Plain Bend RRJ	800		400	
1571.375.45° (SN8)	Plain Bend RRJ	800		400	
1571.375.88° (SN8)	Plain Bend RRJ	800		400	
1571.475.11° (SN8)	Plain Bend RRJ	1200		500	
1571.475.22° (SN8)	Plain Bend RRJ	1200		500	
1571.475.45° (SN8)	Plain Bend RRJ	1200		500	
1571.475.88° (SN8)	Plain Bend RRJ	1200		500	



375mm and 475mm fittings are a non-stock item and are therefore made to order and non-returnable


All fittings are fibreglassed

NB: RRJ fittings are Female/Male

Rubber rings included

AS/NZS 1260:20029

## JUNCTIONS – RRJ

**1574**


Code	Description	A	B	C	D
<b>1574.150.45° (SN8)</b>	Female/Female/Male	700	160	160	455
<b>1574.175.45° (SN8)</b>	Female/Female/Male	800	200	200	800
<b>1574.225.45° (SN8)</b>	Female/Female/Male	1000	250	250	765
<b>1574.300.45° (SN8)</b>	Female/Female/Male	1000	315	315	750
<b>1574.375.45° (SN8)</b>	Female/Female/Male	1500	400	400	
<b>1574.150.100.45° (SN8)</b>	Female/Female/Male	600	110	160	250
<b>1574.175.100.45° (SN8)</b>	Female/Female/Male	600	110	200	250
<b>1574.225.100.45° (SN8)</b>	Female/Female/Male	650	110	250	400
<b>1574.300.100.45° (SN8)</b>	Female/Female/Male	750	110	315	475
<b>1574.375.100.45° (SN8)</b>	Female/Female/Male	750	110	400	550
<b>1574.175.150.45° (SN8)</b>	Female/Female/Male	750	160	200	425
<b>1574.225.150.45° (SN8)</b>	Female/Female/Male	750	160	250	475
<b>1574.300.150.45° (SN8)</b>	Female/Female/Male	800	160	315	670
<b>1574.375.150.45° (SN8)</b>	Female/Female/Male	850	160	400	700
<b>1574.225.175.45° (SN8)</b>	Female/Female/Male	800	200	250	540
<b>1574.300.175.45° (SN8)</b>	Female/Female/Male	1000	200	315	605
<b>1574.375.175.45° (SN8)</b>	Female/Female/Male	1000	200	400	690
<b>1574.300.225.45° (SN8)</b>	Female/Female/Male	1000	250	315	670
<b>1574.375.225.45° (SN8)</b>	Female/Female/Male	1500	250	400	755

475mm fittings are also available on request

375mm and 475mm fittings are a non-stock item and are therefore made to order and non-returnable

All fittings are fibreglassed

NB: RRJ fittings are Female/Female/Male (mainway/branch/mainway)

Rubber rings included

AS/NZS 1260:2009

## JUNCTIONS – DOUBLE RRJ

Code	Description	A	B	C	D
<b>1504.150.45° (SN8)</b>	Female/Female/Female				
<b>1504.175.45° (SN8)</b>	Female/Female/Female	800	200	200	800
<b>1504.225.45° (SN8)</b>	Female/Female/Female	1000	250	250	765
<b>1504.300.45° (SN8)</b>	Female/Female/Female	1000	315	315	750
<b>1504.375.45° (SN8)</b>	Female/Female/Female	1500	400	400	
<b>1504.150.100.45° (SN8)</b>	Female/Female/Female	600	110	160	250
<b>1504.175.100.45° (SN8)</b>	Female/Female/Female	600	110	200	250
<b>1504.225.100.45° (SN8)</b>	Female/Female/Female	650	110	250	400
<b>1504.300.100.45° (SN8)</b>	Female/Female/Female	750	110	315	475
<b>1504.375.100.45° (SN8)</b>	Female/Female/Female	750	110	400	550
<b>1504.175.150.45° (SN8)</b>	Female/Female/Female	750	160	200	425
<b>1504.225.150.45° (SN8)</b>	Female/Female/Female	750	160	250	475
<b>1504.300.150.45° (SN8)</b>	Female/Female/Female	800	160	315	670
<b>1504.375.150.45° (SN8)</b>	Female/Female/Female	850	160	400	700
<b>1504.225.175.45° (SN8)</b>	Female/Female/Female	800	200	250	540
<b>1504.300.175.45° (SN8)</b>	Female/Female/Female	1000	200	315	605
<b>1504.375.175.45° (SN8)</b>	Female/Female/Female	1000	200	400	690
<b>1504.300.225.45° (SN8)</b>	Female/Female/Female	1000	250	315	670
<b>1504.375.225.45° (SN8)</b>	Female/Female/Female	1500	250	400	755

475mm fittings are also available on request


375mm and 475mm fittings are a non-stock item and are therefore made to order and non-returnable

All fittings are fibreglassed

NB: All RRJ fittings are Female/Female/Female (mainway/branch/mainway)

Rubber rings included

AS/NZS 1260:2009



## JUNCTIONS – LUNDEN – RRJ

**1574**

Code	Description	A	B	C	D
<b>1574.150.88° (SN8)</b>	Female/Female/Male	600	160	160	360
<b>1574.175.88° (SN8)</b>	Female/Female/Male	800	200	200	580
<b>1574.225.88° (SN8)</b>	Female/Female/Male	1000	250	250	648
<b>1574.300.88° (SN8)</b>	Female/Female/Male	1000	315	315	
<b>1574.375.88° (SN8)</b>	Female/Female/Male		400	400	
<b>1574.150.100.88° (SN8)</b>	Female/Female/Male	600	110	160	220
<b>1574.175.100.88° (SN8)</b>	Female/Female/Male	600	110	200	250
<b>1574.225.100.88° (SN8)</b>	Female/Female/Male	600	110	250	250
<b>1574.300.100.88° (SN8)</b>	Female/Female/Male	750	110	315	250
<b>1574.375.100.88° (SN8)</b>	Female/Female/Male	750	110	400	300
<b>1574.175.150.88° (SN8)</b>	Female/Female/Male	650	160	200	385
<b>1574.225.150.88° (SN8)</b>	Female/Female/Male	750	160	250	410
<b>1574.300.150.88° (SN8)</b>	Female/Female/Male	800	160	315	440
<b>1574.375.150.88° (SN8)</b>	Female/Female/Male	1000	160	400	480
<b>1574.225.175.88° (SN8)</b>	Female/Female/Male	800	200	250	605
<b>1574.300.175.88° (SN8)</b>	Female/Female/Male	1000	200	315	637
<b>1574.375.175.88° (SN8)</b>	Female/Female/Male	1200	200	400	680
<b>1574.300.225.88° (SN8)</b>	Female/Female/Male	1000	250	315	680
<b>1574.375.225.88° (SN8)</b>	Female/Female/Male	1500	250	400	723

475mm fittings are also available on request


375mm and 475mm fittings are a non-stock item and are therefore made to order and non-returnable

All fittings are fibreglassed

NB: All RRJ fittings are Female/Female/Male (mainway/branch/mainway)

Rubber rings included

AS/NZS 1260:2009

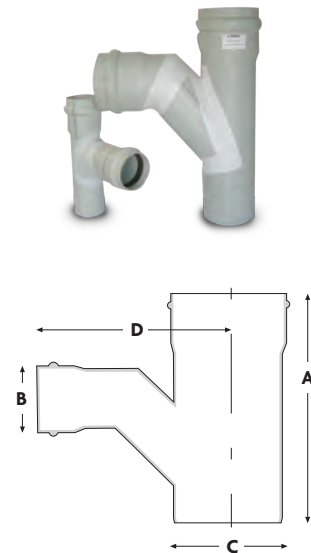

## JUNCTIONS – LUNDEN – DOUBLE RRJ

Code	Description	A	B	C	D
<b>1504.150.88° (SN8)</b>	Female/Female/Female	600	160	160	360
<b>1504.175.88° (SN8)</b>	Female/Female/Female	800	200	200	580
<b>1504.225.88° (SN8)</b>	Female/Female/Female	1000	250	250	
<b>1504.300.88° (SN8)</b>	Female/Female/Female	1000	315	315	
<b>1504.375.88° (SN8)</b>	Female/Female/Female				
<b>1504.150.100.88° (SN8)</b>	Female/Female/Female	600	110	160	220
<b>1504.175.100.88° (SN8)</b>	Female/Female/Female	600	110	200	250
<b>1504.225.100.88° (SN8)</b>	Female/Female/Female	600	110	250	250
<b>1504.300.100.88° (SN8)</b>	Female/Female/Female	750	110	315	250
<b>1504.375.100.88° (SN8)</b>	Female/Female/Female	750	110	400	300
<b>1504.175.150.88° (SN8)</b>	Female/Female/Female	650	160	200	385
<b>1504.225.150.88° (SN8)</b>	Female/Female/Female	750	160	250	410
<b>1504.300.150.88° (SN8)</b>	Female/Female/Female	800	160	315	440
<b>1504.375.150.88° (SN8)</b>	Female/Female/Female	1000	160	400	480
<b>1504.225.175.88° (SN8)</b>	Female/Female/Female	800	200	250	605
<b>1504.300.175.88° (SN8)</b>	Female/Female/Female	1000	200	315	637
<b>1504.375.175.88° (SN8)</b>	Female/Female/Female	1200	200	400	680
<b>1504.300.225.88° (SN8)</b>	Female/Female/Female	1000	250	315	
<b>1504.375.225.88° (SN8)</b>	Female/Female/Female	1500	250	400	

475mm fittings are also available on request


375mm and 475mm fittings are a non-stock item and are therefore made to order and non-returnable

All fittings are fibreglassed

NB: All RRJ fittings are Female/Female/Female (mainway/branch/mainway)

Rubber rings included


AS/NZS 1260:2009



## MANHOLE – SHORT – PLAIN – RRJ


Code		Description	A	B	C	D
<b>1500PL.150 (SN8)</b>	600	Ungritted	600		110	
	1000	Ungritted	1000		110	
<b>1500PL.175 (SN8)</b>	600	Ungritted	600		160	
	1000	Ungritted	1000		160	
<b>1500PL.225 (SN8)</b>	600	Ungritted	600		200	
	1000	Ungritted	1000		200	
<b>1500PL.300 (SN8)</b>	600	Ungritted	600		250	
	1000	Ungritted	1000		250	
<b>1500PL.375 (SN8)</b>	600	Ungritted	600		315	
	1000	Ungritted	1000		315	
<b>1500PL.475 (SN8)</b>	600	Ungritted	600		400	
	1000	Ungritted	1000		500	

Rubber rings included



## MANHOLE – SHORT – GRITTED – RRJ

Code		Description	A	B	C	D
<b>1500GR.150.600 (SN8)</b>		Manhole Short	600		160	200
<b>1500GR.175.600 (SN8)</b>		Manhole Short	600		200	200
<b>1500GR.225.600 (SN8)</b>		Manhole Short	650		250	220
<b>1500GR.300.600 (SN8)</b>		Manhole Short	650		315	250
<b>1500GR.375.600 (SN8)</b>		Manhole Short	600		400	300
<b>1500GR.475.1000 (SN8)</b>		Manhole Short	1000		500	300



AS/NZS 1260:2009

1500



SN8


**1510**

## COUPLING – PLAIN – RRJ

Code	Description	A	B	C	D
<b>1510.L.150 (SN8)</b>	Plain Coupling RRJ				
<b>1510.L.175 (SN8)</b>	Plain Coupling RRJ	445		200	
<b>1510.L.225 (SN8)</b>	Plain Coupling RRJ	450		250	
<b>1510.L.300 (SN8)</b>	Plain Coupling RRJ	650		315	
<b>1511.L.375 (SN8)</b>	Plain Coupling RRJ				
<b>1511.L.475 (SN8)</b>	Plain Coupling RRJ				

Rubber rings included


**1511**

## COUPLING – SLIP – RRJ

Code	Description	A	B	C	D
<b>1511.S.150 (SN8)</b>	Slip Coupling RRJ				
<b>1511.S.175 (SN8)</b>	Slip Coupling RRJ	350		200	
<b>1511.S.225 (SN8)</b>	Slip Coupling RRJ	400		250	
<b>1511.S.300 (SN8)</b>	Slip Coupling RRJ	500		315	

Rubber rings included  
AS/NZS 1260:2009

