



SLOTTED PIPES INDEX

Slotted Pipe For Subsoil Drains	9.1
Threaded Pipe For Environmental Monitoring	9.1
Slotted Pipe For Wellscreens & Environmental Monitoring	9.2
Threaded & Slotted Pipe For Environmental Monitoring	9.3
Dewatering Spears	9.4
Pipe Fittings	9.5
Threaded PVC End Cap	9.5
Strata Slotted Pipe Product Listing	9.6




F2

SLOTTED PIPE FOR SUBSOIL DRAINS

CODE	PIPE TYPE	OD (mm)	NO. ROWS	A	B	C	D
F2.32.6	32mm PN12	42.2	2	10mm	1mm		
F2.40.6	40mm PN12	48.2	2	10mm	1mm		
F2.50.6	50mm PN12	60.3	2	10mm	1mm		
F2.87.6	87mm HDPE	87.0	2	10mm	1mm		
F2.110.6	110mm HDPE	110.0	2	10mm	1mm		
F2.90.6	90mm Stormwater	90.0	2	10mm	1mm		
F2.100.6	100mm Stormwater	110.0	2	10mm	1mm		
F2.150.6	150mm Stormwater	160.0	2	10mm	1mm		


Standard PVC fittings are available for the above referenced pipe sizes. Standard slot specification for PVC pipe is for 1.0mm slots at 10mm spacing in alternating groups of ten slots between rows. This provides an effective opening area as to Transit NRB F2 1989 standard. Slotted pipe is sold in 6.0 metre lengths. Contract rates on request.

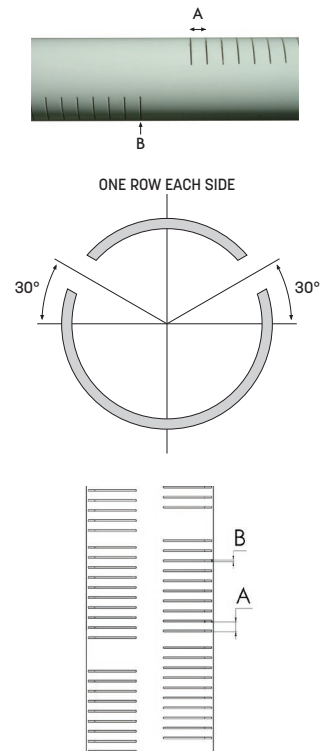

DRILLED PIPE FOR SUBSOIL DRAINS


CODE	PIPE TYPE	OD (mm)	NO. ROWS	A	B
DRILLF2110	Polyethylene	110mm	4	76mm	6.5mm
DRILLF2160	Polyethylene	160mm	4	76mm	6.5mm
DRILLF2180	Polyethylene	180mm	4	76mm	6.5mm
DRILLF2225	Polyethylene	225mm	6	76mm	6.5mm
DRILLF2250	Polyethylene	250mm	6	76mm	6.5mm
DRILLF2315	Polyethylene	315mm	6	76mm	6.5mm

SLOTTED PIPE FOR WELLSCREENS & ENVIRONMENTAL MONITORING



30


CODE	PIPE TYPE	OD (mm)	NO. ROWS	WALL THICKNESS	A	B	C	D
3015PNI5.6-0.5	15mm PNI5	21.2	2	1.7mm	6mm	0.5mm		17.8
3015PNI5.6-0.75	15mm PNI5	21.2	2	1.7mm	6mm	0.75mm		17.8
3015PNI5.6-1.0	15mm PNI5	21.2	2	1.7mm	6mm	1.0mm		17.8
3020PNI5.6-0.5	20mm PNI5	26.7	2	1.9mm	6mm	0.5mm		22.4
3020PNI5.6-0.75	20mm PNI5	26.7	2	1.9mm	6mm	0.75mm		22.4
3020PNI5.6-1.0	20mm PNI5	26.7	2	1.9mm	6mm	1.0mm		22.4
3025PNI5.6-0.5	25mm PNI5	33.6	3	2.2mm	6mm	0.5mm		28.7
3025PNI5.6-0.75	25mm PNI5	33.6	3	2.2mm	6mm	0.75mm		28.7
3025PNI5.6-1.0	25mm PNI5	33.6	3	2.2mm	6mm	1.0mm		28.7
3032PNI2.6-0.5	32mm PNI2	42.3	3	2.2mm	6mm	0.5mm		37.5
3032PNI2.6-0.75	32mm PNI2	42.3	3	2.2mm	6mm	0.75mm		37.5
3032PNI2.6-1.0	32mm PNI2	42.3	3	2.2mm	6mm	1.0mm		37.5
3040PNI2.6-0.5	40mm PNI2	48.3	3	2.5mm	6mm	0.5mm		42.8
3040PNI2.6-0.75	40mm PNI2	48.3	3	2.5mm	6mm	0.75mm		42.8
3040PNI2.6-1.0	40mm PNI2	48.3	3	2.5mm	6mm	1.0mm		42.8
3050PN9.6-0.5	50mm PN9	60.4	3	2.5mm	6mm	0.5mm		55.1
3050PN9.6-0.75	50mm PN9	60.4	3	2.5mm	6mm	0.75mm		55.1
3050PN9.6-1.0	50mm PN9	60.4	3	2.5mm	6mm	1.0mm		55.1
3050PNI2.6-0.5	50mm PNI2	60.4	3	3.1mm	6mm	0.5mm		53.5
3050PNI2.6-0.75	50mm PNI2	60.4	3	3.1mm	6mm	0.75mm		53.5
3050PNI2.6-1.0	50mm PNI2	60.4	3	3.1mm	6mm	1.0mm		53.5
3050PNI5.6-0.5	50mm PNI5	60.4	3	3.9mm	6mm	0.5mm		52.1
3050PNI5.6-0.75	50mm PNI5	60.4	3	3.9mm	6mm	0.75mm		52.1
3050PNI5.6-1.0	50mm PNI5	60.4	3	3.9mm	6mm	1.0mm		52.1
3065PNI2.6-0.5	65mm PNI2	75.2	4	3.9mm	6mm	0.5mm		67.0
3065PNI2.6-0.75	65mm PNI2	75.2	4	3.9mm	6mm	0.75mm		67.0
3065PNI2.6-1.0	65mm PNI2	75.2	4	3.9mm	6mm	1.0mm		67.0
3080PN9.6-0.5	80mm PN9	89.0	5	3.5mm	6mm	0.5mm		81.3
3080PN9.6-0.75	80mm PN9	89.0	5	3.5mm	6mm	0.75mm		81.3
3080PN9.6-1.0	80mm PN9	89.0	5	3.5mm	6mm	1.0mm		83.1
3080PNI2.6-0.5	80mm PNI2	89.0	5	4.6mm	6mm	0.5mm		78.9
3080PNI2.6-0.75	80mm PNI2	89.0	5	4.6mm	6mm	0.75mm		78.9
3080PNI2.6-1.0	80mm PNI2	89.0	5	4.6mm	6mm	1.0mm		78.9

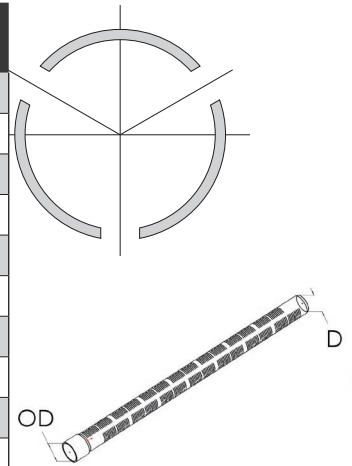

Larger screen sizes are priced upon request
Pipe manufactured in accordance with AS/NZS 1477:2010

SLOTTED PIPES

THREADED & SLOTTED PIPE FOR ENVIRONMENTAL MONITORING



CODE	PIPE TYPE	OD (MM)	A	B	C	D
3040PN15.3.T-0.5	40mm PN15	48.3	6mm	0.5mm		41.6
3050PN15.1.T-0.5	50mm PN15	60.4	6mm	0.5mm		52.1
3050PN15.1.T-0.75	50mm PN15	60.4	6mm	0.75mm		52.1
3050PN15.1.T-1.0	50mm PN15	60.4	6mm	1.0mm		52.1
3050PN15.2.T-0.5	50mm PN15	60.4	6mm	0.5mm		52.1
3050PN15.2.T-0.75	50mm PN15	60.4	6mm	0.75mm		52.1
3050PN15.2.T-1.0	50mm PN15	60.4	6mm	1.0mm		52.1
3050PN15.3.T-0.5	50mm PN15	60.4	6mm	0.5mm		52.1
3050PN15.3.T-0.75	50mm PN15	60.4	6mm	0.75mm		52.1
3050PN15.3.T-1.0	50mm PN15	60.4	6mm	1.0mm		52.1
3065PN12.3.T-0.5	65mm PN15	75.2	6mm	0.5mm		67.0
3065PN12.3.T-0.75	65mm PN15	75.2	6mm	0.75mm		67.0
3065PN12.3.T-1.0	65mm PN15	75.2	6mm	1.0mm		67.0
3065PN12.6.T-0.5	65mm PN15	75.2	6mm	0.5mm		67.0
3065PN12.6.T-0.75	65mm PN15	75.2	6mm	0.75mm		67.0
3065PN12.6.T-1.0	65mm PN15	75.2	6mm	1.0mm		67.0
3080PN12.3.T-0.5	80mm PN15	89.0	6mm	0.5mm		78.9
3080PN12.3.T-0.75	80mm PN15	89.0	6mm	0.75mm		78.9
3080PN12.3.T-1.0	80mm PN15	89.0	6mm	1.0mm		78.9
3080PN12.6.T-0.5	80mm PN15	89.0	6mm	0.5mm		78.9
3080PN12.6.T-0.75	80mm PN15	89.0	6mm	0.75mm		78.9
3080PN12.6.T-1.0	80mm PN15	89.0	6mm	1.0mm		78.9
30100PN12.3.T-0.5	100mm PN15	114.0	6mm	0.5mm		101.7
30100PN12.3.T-0.75	100mm PN15	114.0	6mm	0.75mm		101.7
30100PN12.3.T-1.0	100mm PN15	114.0	6mm	1.0mm		101.7
30100PN12.6.T-0.5	100mm PN15	114.0	6mm	0.5mm		101.7
30100PN12.6.T-0.75	100mm PN15	114.0	6mm	0.75mm		101.7
30100PN12.6.T-1.0	100mm PN15	114.0	6mm	1.0mm		101.7

Sizes up to 450mm available on request
Pipe manufactured in accordance with AS/NZS 1477:2010


THREADED PIPE FOR ENVIRONMENTAL MONITORING

CODE	PIPE TYPE	OD (MM)	A	B	C	D
3040PN15.3.T	40mm PN15	48.3				41.6
3050PN15.1.T	50mm PN15	60.4				52.1
3050PN15.2.T	50mm PN15	60.4				52.1
3050PN15.3.T	50mm PN15	60.4				52.1
3065PN12.3.T	65mm PN15	75.2				67.0
3065PN12.6.T	65mm PN15	75.2				67.0
3080PN12.3.T	80mm PN15	89.0				78.9
3080PN12.6.T	80mm PN15	89.0				78.9
30100PN12.3.T	100mm PN15	114.0				101.7
30100PN12.6.T	100mm PN15	114.0				101.7

Sizes up to 450mm available on request
Pipe manufactured in accordance with AS/NZS 1477:2010



30










DEWATERING SPEARS

CODE	DESCRIPTION	PIPE TYPE	A	B	C	D
Spear40.3	3m Dewatering Spear Bottom 500mm Slotted	40mm PN15	6mm	0.5mm		
Spear40.4	4m Dewatering Spear Bottom 500mm Slotted	40mm PN15	6mm	0.5mm		
Spear40.6-0.5	6m Dewatering Spear Bottom 500mm Slotted	40mm PN15	6mm	0.5mm		
Spear40.6-0.6	6m Dewatering Spear Bottom 600mm Slotted	40mm PN15	6mm	0.5mm		
Spear40.6-1.0	6m Dewatering Spear Bottom 1000mm Slotted	40mm PN15	6mm	0.5mm		



PIPE FITTINGS

CODE	PIPE TYPE	A	B	C
Packer 80	Female Steel Socket	75	104	86
813m.80	Male Threaded PVC Adapter	95	99	75
Plug 80	Wooden Plug	35	72	80
Packer Set	Packer 80 & 813m.80 & Plug 80			
Plug 50s	Lockable Security Plug	28	49	62
Plug 100s	Lockable Security Plug	28	97	105
Tobyal 240m	Lockable Alloy Toby Box	88	242	277



30

THREADED PVC END CAP

CODE	PIPE TYPE	A	B
3050T.Male	Male Thread	95	60.1
3065T.Male	Male Thread	70	72
3080T.Male	Male Thread	90	89
30100T.Male	Male Thread	100	114
30150T.Male	Male Thread	150	160
3050T.Female	Female Thread	95	60.1
3065T.Female	Female Thread	70	72
3080T.Female	Female Thread	90	89
30100T.Female	Female Thread	100	114
30150T.Female	Female Thread	150	160
3050T.Tape	Female Thread – Tapered End	95	60.1

SLOTTED PIPES



STRATA SLOTTED PIPE PRODUCT LISTING

ENVIRONMENTAL MONITORING

- ⌘ Flush threaded screen and casing. 50mm to 300mm dia.
Minimum quantities apply
- ⌘ Lockable caps, 50mm and 100mm size
- ⌘ Monitor Well caps (Toby Boxes) cast from aluminium, hinged lid
- ⌘ Gas Monitoring wells with large slot opening



WELLSCREENS

- ⌘ All sizes from 50mm to 500mm diameter, with socketed ends
- ⌘ Special seals for telescoping installations



HORIZONTAL DRAINS

- ⌘ Slotted PVC pipe with smooth bore for free flow of water
- ⌘ Flush fitting end caps

SUBSOIL

- ⌘ Low cost, rigid HDPE slotted subsoil pipe, 90mm and 110mm diameter
- ⌘ Slotted PVC and HDPE pipe

SUBSOIL AND LAND FILL LEACHATE DRAINS – (Deep overburden)

- ⌘ HDPE and ABS pipe
- ⌘ mPVC Rhino Pipe – High strength modified PVC pipe

SEPTIC TANK

- ⌘ Slotted HDPE effluent pipe

FILTER SOCKS

- ⌘ To fit all sizes of PVC

LARGE DIAMETER WELLSCREENS

- ⌘ For shallow wells of diameters 600mm and larger

SLOT SPACING AND SLOT OPENING WIDTHS

- ⌘ Precision cut slots with width of 0.5mm, 1.0mm, 1.6mm and up to 10mm, depending upon specification, application and soil grain size
- ⌘ Standard Slot Spacing 6mm or 10mm. Other spacings to order

We manufacture to your requirements





Strata Plastics

QUALITY & INNOVATION & SERVICE

» 36 Tawn Place & Pukete
PO Box 5315 & Frankton
Hamilton 3242 & New Zealand

www.strataplastics.co.nz